

PurePath™ Wireless Audio



PurePath™ Wireless

Uncompressed CD-quality wireless audio.

TI's PurePath™ Wireless audio products feature robust and high-quality 2.4 GHz devices for wireless digital audio streaming. The proprietary PurePath technology provides a solid wireless audio link and 16 bit / 44.1/48 KHz uncompressed audio with no unwanted noise or dropouts. It uses a number of RF channels dynamically chosen for lossless audio transmission, resulting in minimal interference with other RF devices in the 2.4 GHz band. With its built-in audio setup and HID interface, no software development is required. PurePath Wireless supports digital streaming for up to four audio channels and single-chip USB wireless audio products (CC8521 and CC8531) make the solution ideal for PC centric applications. The low and fixed programmable audio latency and distributed audio clock ensure perfect time synchronization between speakers. Combined with the easy-to-use configuration tool and application reference designs, TI's PurePath wireless audio solution ensures flexibility, cost-efficiency and a fast time-to-market.

Key features

- Single chip RF-IC solution dedicated to wireless audio
- Includes IC, RF protocol, application designs, built-in audio IC setup and HID interface
- 16-bit 44.1/48kHz audio link
- Multichannel streaming capabilities
- USB support. USB HID functions mapped to I/O pins.
- Free PurePath Wireless PC Configurator tool
- Built in intelligent audio protocol
- I2S and DSP/TDM interface support Codecs, ADCs, DACs, class-D amplifiers

Key benefits

- Uncompressed and lossless wireless stereo audio
- Enables streaming on up to four channels and to up to four devices
- Complete solution, no software development required
- Customizable solution, can optionally work with external MCU
- Data transfer possible in addition to wireless audio streaming
- Best-in-class coexistence with *Bluetooth*, WLAN or other 2.4 GHz devices

Application Areas

- Wireless headphones / headsets
- Wireless speaker systems
- Wireless signal cable replacement
- Wireless home theatre systems

CC85xx PurePath™ Wireless Audio family

The CC85xx PurePath Wireless system-on-chip (SoC) family provides robust, high quality, short-range 2.4 GHz wireless digital audio streaming in low-cost single chip solutions:

- CC8520 SoC supporting up to 2 audio channels
- CC8521 SoC supporting up to 2 audio channels and USB support
- CC8530 SoC supporting up to 4 audio channels
- CC8531 SoC supporting up to 4 audio channels and USB support



Flawless wireless sound.

Great care has been taken to ensure that the PurePath Wireless audio network provides gap-less and robust audio streaming in varied environments, and that it can coexist amicably with existing wireless technologies in the crowded 2.4 GHz ISM band. Most applications can be implemented without any software development and only require the CC85xx to be connected to an external audio source or sink (such as an audio codec, S/PDIF interface or class-D amplifier) and a few push buttons, switches or LED for human interaction. Advanced applications can interface a host processor or DSP directly to the CC85xx and directly stream audio and control most aspects of device and audio network operation.

The CC85xx have built-in wireless audio protocol with excellent robustness and coexistence through multiple techniques:

- Adaptive Frequency Hopping
- Forward Error Correction
- Buffering and Retransmission
- Error Concealment
- Optional high quality audio compression

High-quality wireless headphones & headsets

Production ready reference design

As part of the PurePath Wireless audio family, TI offers the market's most cost-effective reference design for high-quality headsets and headphones. The design enables 22 hours on 465mAh battery, which provides 100% longer battery life compared to today's standard headsets. The free reference design is available together with the CC85XXDK-HEADSET development kit which enables easy testing of complete headphone and headset functionality. The reference design consists of all-TI components, including BQ25015 power management device, the low-power TLV320AIC3204 audio codec and CC2590 range extender.



External system

- Seamless connection and control of selected TI audio codecs, DACs/ADCs and digital audio amplifiers using I2S and I2C
- HID functions like power control, binding, volume control, audio channel selection can be mapped to I/Os
- RoHS compliant 6mm x 6mm QFN-40 package

RF section

- 5 Mbps over-the-air data rate
- Bandwidth-efficient modulation format
- Excellent link budget with programmable output power up to +4 dBm and -83 dBm sensitivity
- Seamless support for CC2590 range extender for even wider RF coverage and improved robustness in difficult environments
- Suited for systems targeting compliance with worldwide radio frequency regulations: ETSI EN 300 328 and EN 300 440 class 2 (Europe), FCC CFR47 Part 15 (US) and ARIB STD-T66 (Japan)

Digital audio support

- CD-quality uncompressed audio (44.1/48KHz, 16 bits)
- Digital I2S audio interface supports 1-2 audio channels (CC852x) or 3-4 audio channels (CC853x) at sample rates of 32, 40.275, 44.1 and 48 kHz / 16 bit word-widths
- Audio latency is fixed and adjustable from less than 20ms
- Data side-channel allows data to be sent alongside the audio between external host controllers

PurePath™ Wireless application examples

The PurePath Wireless technology enables development of audio applications with multichannel and multipoint audio streaming capabilities, as well as out-of-the-box unwiring of headphones, headsets and speakers for consumer applications with USB support.

Headphones & Headsets

TI supplies complete reference designs for headphones and headsets. PurePath Wireless' multichannel and multipoint audio streaming capabilities enable

- Up to four headphones streaming two out of four audio mono channels.
- Up to four headphones receiving same stereo audio stream.
- Up to four headphones can dynamically change between stereo A (two audio channels) or stereo B (two audio channels)



Application areas

- Headphones
- Headsets

USB Headsets, Headphones and Speakers

With single-chip USB wireless audio products (CC8521 and CC8531), PurePath Wireless provides USB audio support for Windows®, Linux®, Mac OS® X and Ubuntu® and enables out-of-the-box unwiring of headsets and speakers for PC, TV, gaming and set-top boxes. The solution enable streaming of up to four simultaneous audio channels from one source through one USB port. TI supplies complete reference design for USB dongles to complement PC headsets and speaker applications.



Application areas

- USB speaker systems
- USB headphones & gaming headsets
- USB headsets
- USB 2.1 speaker systems

Speaker Systems

PurePath Wireless' fixed programmable audio latency and distributed audio clock ensure perfect time synchronization between speakers. With the ability to stream two stereo streams from one audio source to several receivers, the CC8530 enables new use cases for wireless multichannel home audio applications:



Each device can selectively receive one or two of the transmitted audio streams. Example: 2.1 speaker system



Up to four devices streaming one out of four audio channels. Example: Multi-room system where two speaker sets play different stereo audio streams.

Application areas


- 2.0 speaker systems
- 2.1 speaker systems
- 3.0 speaker systems
- 3.1 speaker systems

Getting started

PurePath™ Wireless development tools


CC85xxDK

Start your wireless audio design with the CC85XXDK development kits. The kits let the users fully evaluate PurePath Wireless technology and the CC85xx for wireless audio applications. Audio interfaces available with the kit include S/PDIF optical + coax input/output, line input/output, headphone output and microphone input. A TLV320AIC3101 audio codec is mounted on the PurePath Wireless Audio Evaluation Board, which also has connectors compatible with other TI Codecs. CC85XXDK works with PurePath Wireless Configurator PC tool which helps designers configure and test PurePath Wireless audio devices.

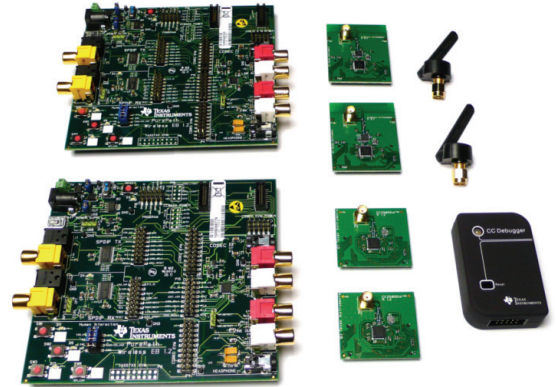


CC85XXDK-HEADSET

The CC85xxDK-HEADSET development kit and associated reference design provides a cost-effective design for high-quality headsets and headphones. The design achieves a 22-hour life on a 465 mAh battery – a 100 percent increase as compared to currently available headsets. The development kit enables easy testing of complete headphone and headset functionality. With all back-end work done by TI, developers can build a prototype in less than one day. The kit is fully programmable with PurePath Wireless Configurator PC tool.

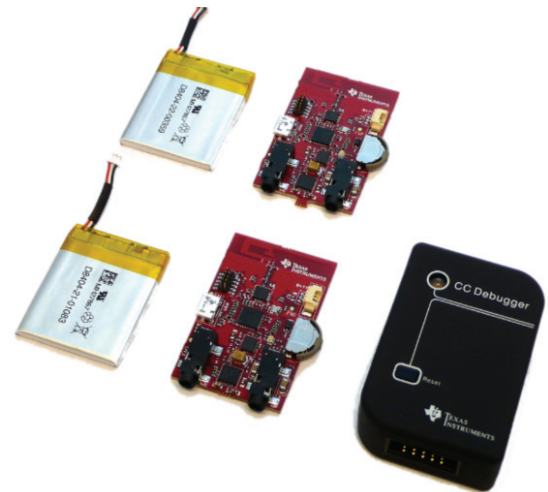

PurePath Wireless Configurator

The PurePath Wireless Configurator (PPWC), a PC-based, graphical configuration tool, is used with the CC85xx to set up the desired functionality and parameters of the target system application. PPWC works on precompiled image files. Based on input from the user, PPWC will patch these to generate a downloadable firmware image. The designer can the CC85XX device directly in PPWC through the CC Debugger tool (included in CC85XXDK development kit) or output it to an Intel HEX-file (for production programming). No extra third party tool is needed for the development of PurePath Wireless-based application.

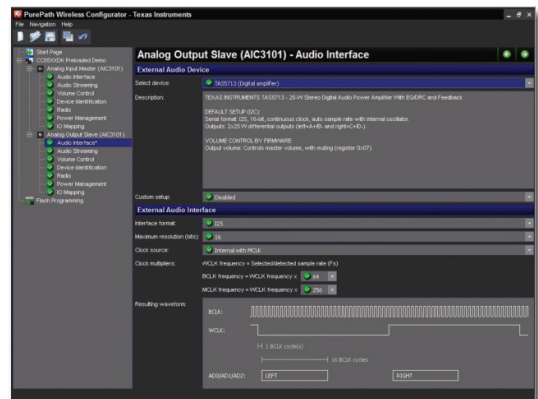

The PPWC can be downloaded for free at www.ti.com/ppwc

For more information on TI's wireless audio solutions and to order your PurePath Wireless development tools, please visit www.ti.com/purepathwireless

Share, explore and solve challenges with fellow engineers and Tiers



Join the TI E2E Community

e2e.ti.com

TI E2E Community
engineer.to.engineer,
solving problems

TI Worldwide Technical Support

Internet

TI Semiconductor Product Information Center Home Page
support.ti.com

TI E2E™ Community Home Page
e2e.ti.com

Product Information Centers

Americas	Phone	+1(972) 644-5580
Brazil	Phone	0800-891-2616
Mexico	Phone	0800-670-7544
	Fax	+1(972) 927-6377
	Internet/Email	support.ti.com/sc/pic/americas.htm

Europe, Middle East, and Africa

Phone		
European Free Call	00800-ASK-TEXAS (00800 275 83927)	
International	+49 (0) 8161 80 2121	
Russian Support	+7 (4) 95 98 10 701	
Note: The European Free Call (Toll Free) number is not active in all countries. If you have technical difficulty calling the free call number, please use the international number above.		
Fax	+ (49) (0) 8161 80 2045	
Internet	support.ti.com/sc/pic/euro.htm	
Direct Email	asktexas@ti.com	

Japan

Phone	Domestic	0120-92-3326
Fax	International	+81-3-3344-5317
	Domestic	0120-81-0036
Internet/Email	International	support.ti.com/sc/pic/japan.htm
	Domestic	www.tij.co.jp/pic

Asia

Phone		
International	+91-80-41381665	
Domestic	Toll-Free Number	
Note: Toll-free numbers do not support mobile and IP phones.		
Australia	1-800-999-084	
China	800-820-8682	
Hong Kong	800-96-5941	
India	1-800-425-7888	
Indonesia	001-803-8861-1006	
Korea	080-551-2804	
Malaysia	1-800-80-3973	
New Zealand	0800-446-934	
Philippines	1-800-765-7404	
Singapore	800-886-1028	
Taiwan	0800-006800	
Thailand	001-800-886-0010	
Fax	+8621-23073686	
Email	tiasia@ti.com or ti-china@ti.com	
Internet	support.ti.com/sc/pic/asia.htm	

Important Notice: The products and services of Texas Instruments Incorporated and its subsidiaries described herein are sold subject to TI's standard terms and conditions of sale. Customers are advised to obtain the most current and complete information about TI products and services before placing orders. TI assumes no liability for applications assistance, customer's applications or product designs, software performance, or infringement of patents. The publication of information regarding any other company's products or services does not constitute TI's approval, warranty or endorsement thereof.

B121709

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Transportation and Automotive	www.ti.com/automotive
Video and Imaging	www.ti.com/video

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated